

## Cutting-Edge Android Mini PC

Adopt all-aluminum alloy structure, fanless and all-closed design, low power consumption of the whole machine, exquisite appearance, and more convenient use and installation; In terms of the materials used for the whole machine, we pay more attention to its reliability, environmental adaptability, practicality, scalability, EMC compatibility and other performance. The interface is rich and supports expansion. It can meet the access of a variety of external devices and provide a variety of working efficiency. It is widely used in industrial control, military, communication, power, network and other automation fields.


### Features >>

- Delicate and compact appearance, convenient installation.
- Self-developed ARM architecture motherboard with multiple options.
- Fanless totally enclosed design, low power consumption of the whole machine.
- High integration, realizing WiFi/Bluetooth/Ethernet triple connection.
- Provide API reference code and support SDK secondary development.
- Abundant interfaces to meet the needs of various external equipment.



### Product Model >>


Product model	Processor
TPC01-AIOT	A64 Cortex-A53 quad-core 64-bit CPU, main frequency 1.5GHz

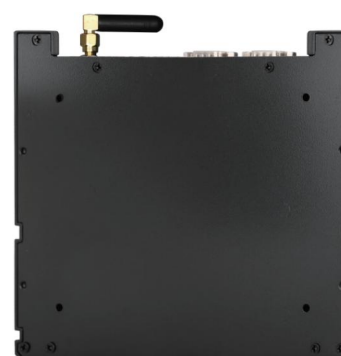

### Product Installation >>



Desktop installation



Rack-mounted

# Product Specifications >>

Hardware Configuration	
CPU	A64 Cortex-A53 quad-core 64-bit CPU, main frequency 1.5GHz
GPU	Mali400MP2 GPU
Memory	2G DDR3 (Optional 4G/8G)
Storage	8G eMMC (Optional 16G/32G/64G)
System	Android 6.0
3G/4G module	PCI-E standard interface, supporting China Mobile, China Unicom and China Telecom (optional)
WIFI	Built-in WIFI dual-band 2.4G/5G
Bluetooth	BT5.0
Decoding resolution	HDMI supports up to 4K 3840 * 2160
Network support	Ethernet, support WIFI/Bluetooth 5.0, wireless peripheral expansion
Power on	Support
Remote Wakeup	Support
Automatic reset	Support
Picture format	Support BMP、JPEG、PNG、GIF

Reliability parameters			
Working temperature	-10 °C ~60°C	Vibration protection	IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
Storage temperature	-20 °C ~70 °C	Impact protection	IEC 60068-2-27, half sine wave, duration 11ms
Operating humidity	Humidity: 95% non condensing	Product certification	CCC/CE/FCC/EMC/CB/ROHS

Other parameters			
Power input	12V power input	Overall size	199.5 * 213.1 * 58.3 (length * width * height)
Static power	15W	Operating Weight	1.9KG
Body color	Gun black	Installation method	Support desktop and rack installation
Warranty policy	Three years (one year free warranty)		
Chassis structure	The aluminum alloy on the case surface has good seismic resistance and impact resistance		

# Interface Distribution >>



# Product size >>

